



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : <b>A61F 2/38</b>	<b>A1</b>	(11) International Publication Number: <b>WO 94/22397</b> (43) International Publication Date: 13 October 1994 (13.10.94)
<p>(21) International Application Number: PCT/GB94/00701</p> <p>(22) International Filing Date: 31 March 1994 (31.03.94)</p> <p>(30) Priority Data: 9306898.9 1 April 1993 (01.04.93) GB</p> <p>(71) Applicant (for all designated States except US): <b>BRITISH TECHNOLOGY GROUP LIMITED [GB/GB]; 101 Newington Causeway, London SE1 6BU (GB).</b></p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): <b>MINNS, Julian, Richard [GB/GB]; 40 Uppertown, Wolsingham, Durham DL13 3ET (GB). ANG, Swee, Chai [GB/GB]; 17 Knollys House, 39 Tavistock Place, London WC1H 9SA (GB). WAL-LACE, Ian, William [GB/GB]; 38 Cranham Close, Ashdown Manor, Killingworth, Tyne &amp; Wear NE12 0FU (GB).</b></p> <p>(74) Agent: <b>PARKER, Geoffrey; British Technology Group Limited, Patent Dept., 101 Newington Causeway, London SE1 6BU (GB).</b></p>		<p>(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>With international search report.</i></p>
<p>(54) Title: <b>IMPLANTABLE PROSTHETIC PATELLAR COMPONENTS</b></p> <p>(57) Abstract</p> <p>An implantable prosthetic patellar component comprises a patellar part (1) having one side (1a) adapted to be secured to the inner surface of a natural patella (10), and a femoral part (3) having one side (5) defining an articulation surface to replace the femoral facet of the patella, the opposite surfaces (1b and 3a) of said parts being mutually engageable to afford sliding movement therebetween in a medio-lateral direction. The implant is able to accommodate relative medio-lateral movement and thereby improve congruency. It may be used in combination with other prosthetic components in a knee joint.</p> <div data-bbox="844 1134 1266 1827"> </div>		

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

IMPLANTABLE PROSTHETIC PATELLAR COMPONENTS

This invention concerns prosthetic patellar components for implantation in the knee joint of a patient.

A number of different knee prostheses have been developed for surgical treatment of the disabling effects of knee joint deterioration, such as results from arthritis, injury or disease. A fairly common operation nowadays is total knee replacement, where the femoral facets of the proximal tibia as well as the patellar and tibial facets of the distal femur are replaced with prosthetic components. It is also recognised that replacing the articulating surface on the posterior aspect of the patella improves the result of such operations, and prosthetic patellar elements for such a purpose have been developed.

More recently study has been carried out directed to investigation of contact stresses between the patella and the femoral components in three common designs of knee prostheses. At different angles of flexion under a load of 500 newtons contact stresses across the patello-femoral interface were monitored. It was determined from these tests that the contact stress areas move outwards towards the periphery of the interface and the contact stress values increase at increases in knee flexion, for all the designs tested. Patellar implants retrieved at revision of the designs tested confirmed wear and deformation in the areas of measured maximum contact stress. All the designs showed poor congruency at all angles of knee flexion.

Examples of prosthetic patellar components are disclosed in DE-U-9116507.5, WO-93/00871 and US-4041550. None of these teachings provides a device which suitably accommodates the conditions referred to above.

To improve this situation the present invention provides a novel implantable prosthetic patellar component, comprising a patellar part having one side adapted to be secured to the inner surface of a natural patella, and a femoral part having one side defining an articulation surface to replace the femoral facet of

- 2 -

the patella, the opposite sides of said parts being mutually engageable to afford sliding movement therebetween in a medio-lateral direction.

The invention therefore provides an implantable prosthetic patellar component of two-part form, these two parts of the component referred to herein as the patellar part and the femoral part. When in place in a patient the component according to the invention allows sliding movement between the two parts in the medio-lateral direction to accommodate naturally occurring relative movement in this direction. Considerable variation in the quadriceps-patellar ligament angle from subject to subject produces variations in the magnitude of the medio-lateral force acting on the patella, and such variations are allowed for by the component of the present invention. This improves congruency throughout flexion and at various loading of the joint, which has the effect of considerably reducing wear and deformation by reducing contact stresses during movement of the joint.

In a preferred form, the engagement between the two parts allows translational sliding movement only in a substantially medio-lateral direction. In this way, sliding displacement of the whole of one part relative to the other part is limited to that in a substantially medio-lateral direction.

Preferably, either the patellar part or the femoral part has an elongated dovetail slot, the other part having a complementary projection, such as a dovetail rib or a flared stud, the slot and the projection being dimensioned for engagement to afford the sliding movement between the two parts. In this way, the mutually interfacing sides of the parts are held in contact and the risk of dislocation of one part from the other is reduced. The provision of a flared stud accomplishes this whilst at the same time allowing relative rotation about an axis in the antero-posterior direction.

Certain embodiments of the invention will now be described by way of example with reference to the accompanying drawings, in which:-

- 3 -

Figures 1a and 1b illustrate a patellar part of a prosthetic patellar component according to the invention;

Figures 2a to 2c illustrate a femoral part of such a component;

5       Figure 3 represents in side elevation a total knee replacement incorporating the patellar component illustrated in Figures 1 and 2; and

Figures 4a and 4b illustrate an alternative form of a femoral part of the component.

10       The patellar part of the illustrated patellar component consists of a metal disc 1 with a planar fixation surface 1a for attachment to an inner surface of a natural patella, and an opposite parallel planar interface surface 1b in which a dovetail slot 2 is machined. Figure 1a shows a plan view of the part,  
15       whilst Figure 1b shows a side elevation.

      The femoral part of the patellar component is shown in Figure 2, where Figure 2a offers a side elevation of the part, Figure 2b offers a front view, Figure 2c offers a top view, and Figure 2d offers a cross section of the part across plane A-A of  
20       Figure 2b.

      The femoral part consists of an articulation element 3 of suitable biocompatible material, such as ultrahigh molecular weight polyethylene, having a planar interface surface 3a, from which a dovetail rib 4 protrudes, this rib being complementary to  
25       the dovetail slot 2 in the patellar part so that when inter-engaged the two can slide smoothly relative to one another in a direction parallel to the slot.

      The opposite side of the femoral part consists of a smooth articulation facet 5 which, as can be seen from Figures 2a and 2c, is concavely curved in one direction and convexly curved  
30       in a perpendicular direction giving the part a 'saddle-shaped' bearing surface. The actual curvatures in both directions will depend on the shape of the corresponding surface of the femoral component against which the part is designed to articulate, this  
35       last shape - the patellar facet - commonly being that of a

- 4 -

trough. The side edges of the part are rounded as can be seen in Figure 2b. Example dimensions for the two parts of the component are given in the figures but clearly can be varied in practice to suit different requirements.

5       The operation of the parts of the component when implanted in a patient's knee will now be described with reference to Figure 3. This shows the patellar component used in a total knee replacement, but it is to be understood that the component could be used as a sole implant, functioning in an otherwise natural  
10 joint.

      The inner surface of the patient's patella 10 is appropriately prepared by a surgeon for fixation to the planar fixation surface of the patellar part 1 and the two are connected together such that the dovetail slot 2 is arranged in the  
15 medio-lateral direction. The fixation may be by means of bone cement and/or fixation pins, or alternatively a projecting stud (not shown) may be provided on the fixation surface of the patellar part to facilitate satisfactory fixation. The femoral part 3 is then engaged with the patellar part by means of the  
20 dovetail slot 2 and complementary rib 4, and the articulation facet 5 is brought into contact with the patellar facet 6 of the femoral component 7. When in place, the articulation facet 5 has a concave sagittal profile and a convex transverse profile (i.e. a convex profile when viewed in superior aspect).

25       In subsequent flexion of the joint, the articulation facet 5 moves against the patellar facet of the femoral component 7, guided in this trough-shaped surface by virtue of the convex transverse profile of its bearing surface. At the same time, the lateral pull during flexion found in the knee joint and described  
30 above is accommodated by a sliding motion between the two parts of the component in the medio-lateral direction. The polyethylene articulation element 3 tracks from side to side by means of the dovetail joint, the planar surfaces 1b and 3a thus sliding smoothly over one another, and this tracking allows  
35 increased congruency throughout flexion and at different loads on the joint.

- 5 -

When the patellar component has been implanted it can be difficult to ensure that the articulation facet at the back of the component will conform with the patellar facet of the femoral component, depending partly on the accuracy of the fixation of the component to the natural patella. For this reason it is beneficial to build into the design the ability to permit rotation in a coronal plane. Figures 4a and 4b (which present similar views to those in Figures 2a and 2b) illustrate a femoral part which allows both rotation and sliding between the two parts of the component. In place of the dovetail rib 4 a central flared stud 20 projects from the planar interface surface. When this stud is engaged in the dovetail slot 2 of the patellar part of the component the two parts can move relative to one another both by sliding in a direction parallel to the slot and by rotation about the stud, and when implanted this design provides, in certain situations, further improved congruency within the joint.

Whilst the invention has been described and illustrated in conjunction with specific embodiments thereof, it should be understood that this in no way limits the scope of the invention, which is intended to embrace all other embodiments that fall within the spirit and scope of the appended claims.

25

30

35

- 6 -

CLAIMS

1. An implantable prosthetic patellar component comprising a patella part having one side adapted to be secured to the inner surface of a natural patella, and a femoral part having one side  
5 defining an articulation surface to replace the femoral facet of the patella, the opposite sides of said parts being mutually engageable to afford sliding movement therebetween in a medio-lateral direction.
2. A component according to Claim 1, wherein the two parts are  
10 engageable for translational sliding movement therebetween only in a substantially medio-lateral direction.
3. A component according to Claim 2, wherein either the patella part or the femoral part has a longitudinal dovetail slot, and the other part has a complementary projection, the slot and the  
15 projection being dimensioned for engagement to afford said sliding movement between the two parts.
4. A component according to Claim 3, wherein the projection is a dovetail rib.
5. A component according to Claim 3, wherein the projection is a  
20 flared stud.
6. A component according to any one of Claims 1 to 5, wherein the articulation surface of the femoral part has a concave sagittal profile.
7. A component according to any one of Claims 1 to 6, wherein  
25 the articulation surface of the femoral part has a convex transverse profile.
8. A component according to any one of Claims 1 to 7, wherein the mutually engageable surfaces of the two parts are substantially planar.

30

35



1/2

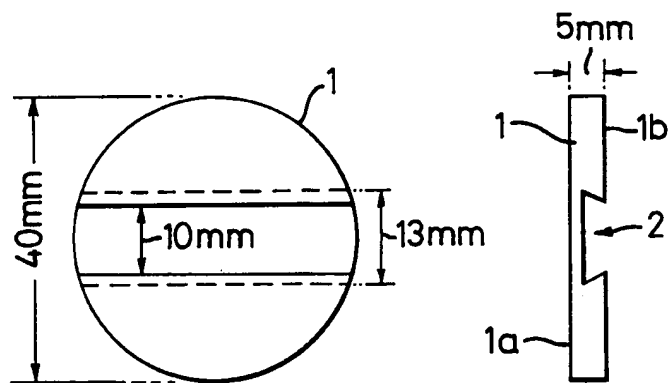


Fig. 1a

Fig. 1b




Fig. 2a

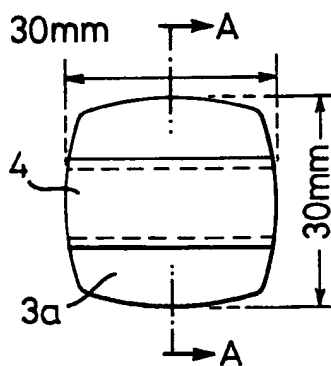


Fig. 2b




Fig. 2d




Fig. 2c

2/2

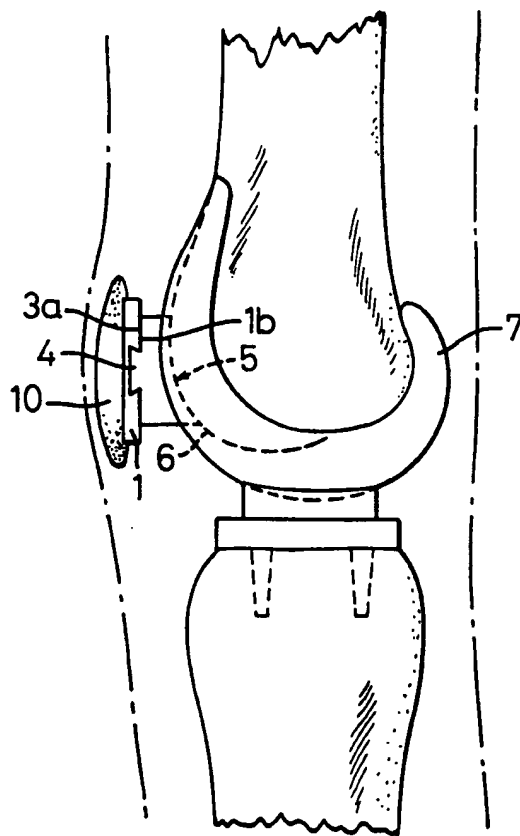


Fig. 3




Fig 4a




Fig 4b

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 94/00701

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 5 A61F2/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,92 03109 (BRITISH TECHNOLOGY GROUP) 5 March 1992 see claims 1,4; figures 1-5 ---	1,2,6
A	US,A,4 041 550 (FRAZIER) 16 August 1977 see column 2, line 32 - line 64; figure 1 ---	1,2
A	WO,A,93 00871 (JOHNSON) 21 January 1993 ---	
A	DE,U,91 16 507 (ESKA MEDICAL) 3 December 1992 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

8 June 1994

Date of mailing of the international search report

21.06.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Kousouretas, I

# INTERNATIONAL SEARCH REPORT

information on patent family members

International application No.

PCT/GB 94/00701

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9203109	05-03-92	EP-A- 0497955 GB-A, B 2247407 US-A- 5246460	12-08-92 04-03-92 21-09-93
US-A-4041550	16-08-77	NONE	
WO-A-9300871	21-01-93	AU-A- 2223192 EP-A- 0593535	11-02-93 27-04-94
DE-U-9116507	03-12-92	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**